

Development of soft switch low voltage high current resonant dc-dc converter

Rajeshri S Tiwari

Department of Electrical Engineering
Shri Ramdeobaba College of Engineering & Management
Nagpur, India
e-mail: rajeshri.tiwari@gmail.com

Sangeeta H Deshmukh

Department of Electrical Engineering
Shri Ramdeobaba College of Engineering & Management
Nagpur, India
e-mail: deshmkhsh@rknec.edu

Abstract—This project is about to develop the power converter with improved performance with low voltage and high current dc output. One of the application of low voltage, high current dc output is supercapacitor charger (12V, 25A). This paper describes the high frequency (hf) transformer and resonant inverter intended to obtain better efficiency by maintaining the constant low voltage.

Keywords- Resonating components, High frequency transformer, Leakage inductance, Transfer Function.

I. INTRODUCTION

Advent of devices with better switching capabilities has enriched the field of power electronics. This enables the development of converter circuits with improved and high performance [6]. The AC-DC converters are characterized so as to obtain low voltage and high current dc output. Conventional converters are most common but they have clumsy structures, slow system responses and high ripples level of voltage and current. At present there are several types of power supplies to charge supercapacitors but they do not make so convenient solutions for high current low voltage dc output with high performance and low losses.

In this study several topologies have been investigated for modelling high current low voltage converter having low current and voltage ripples which is the most crucial point of system design. High frequency resonant inverter provides novel solution to the problem offered by conventional inverter and also they can be operated in variable and high frequency mode. Owing to higher frequency of operation component sizes get reduced thereby component stress. On the other hand conventional converter was found to have several disadvantages such as bulky size, heavy weight, high di/dt value, high voltage stress, turn on and turn off losses, low efficiency, etc. The above demerits are overcome by high frequency resonant converter. It has numerous advantages such as light weight, higher frequency of operation, high efficiency, small size, fast response, low component stress, less electromagnetic interference (EMI) etc.

This topological modification will have other advantages: (a) the minimum regulation of the DC voltage at the rectifier output becomes possible, (b) the power losses in the core are reduced, (c) the power efficiency is consequently increased, (d) the size, weight of the converter are reduced and (e) the electro-magnetic interference (EMI) disturbances are reduced.

II. POWER CIRCUIT DIAGRAM OF AC-DC CONVERTER

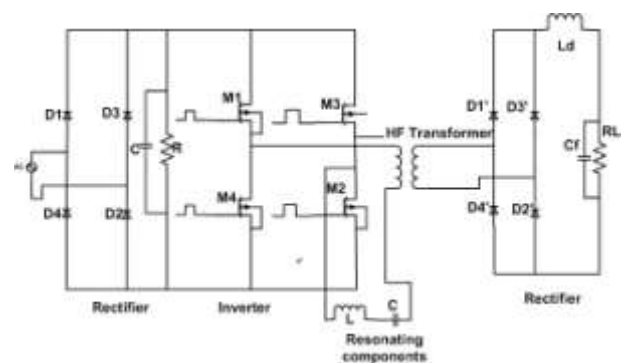


Fig.1

The above figure shows the power circuit diagram of AC-DC converter for low voltage/high current dc output application with high performance. Focussing towards the improvement in the performance, the converter circuit has been divided into five stages.

In the 1st stage, when ac supply is fed to the single phase uncontrolled diode rectifier, there is conversion of ac to dc. Filters have been added to avoid ripples and to have constant smooth dc output.

In the 2nd stage, output from rectifier is applied to single phase full bridge high frequency inverter circuit. MOSFET switches are used in the inverter circuit as they have fast switching speed and give better efficiency at high frequency. The switching frequency is 25 KHz. The high frequency inverter has numerous advantages such as light weight, better system reliability and efficiency at higher frequency, small size, quick response, low component stress, reduced electromagnetic interference (EMI), etc.

The 3rd stage is LC tank resonating circuit. The LC resonating components of high frequency inverter help to minimize the leakage reactance of the transformer. There are three types of resonant converter.

A. Series resonant converter

Series Resonant Converter uses a series capacitor, which blocks the dc component avoiding high frequency (HF) transformer saturation. Its part load efficiency is high due to the decrease in device currents with decrease in load. Output dc filter is required to carry high ripple current

B. Parallel resonant converter

Parallel resonant converter works such that the entire current is limited by resonant inductor when the output terminal is short circuited[6].The filter inductor limits the ripple current carried by the output capacitor.

C. Series parallel resonant converter

Series parallel resonant converter(sprc)combines desirable features of series and parallel resonant converter[10].Thus the behaviour of series parallel resonant converter was found to be suitable for low voltage dc application and was observed in detail.At light loads it takes the property of parallel resonant converter.The load can be short circuited and light load regulation is possible[6].Current through high frequency switches does not decrease in proportion to decrease in load and hence produces high efficiency.The resonant tank circuit consists of capacitor and inductor which is placed across primary winding of high frequency transformer and thus forms series parallel resonant converter.

In the 4th stage,resonant inverter output is applied to HF transformer. High frequency(HF) transformer specified for low voltage high current output applications have been useful for establishing more advanced power distribution with energy storage systems.The HF transformer non idealities such as leakage inductance and winding capacitance are utilized as a part of resonant tank circuit elements[8].This configuration is well suited for low output voltage giving better performance in terms of efficiency and voltage regulation.The leakage inductance of HF transformer can be used as a part of resonating inductor.Hence the transformer leakage inductance need not be a troublesome parasitic.Thus power loss and voltage spike magnitude will not increase.The HF transformer has several advantages such as low eddy current losses at higher accurate frequency, skin effects are minimized, low leakage inductance, reduction in size, weight and cost etc.Skin effect is the tendency of an AC to become disturbed within a conductor such that the current density is largest near the surface of the conductor[7-9]. It causes the effective resistance of the conductor to increase at higher frequency where the skin depth is smaller,thus reducing the effective cross section of conductor.Hence the transformer output will be low ac voltage and high ac current.


In the 5th stage, output of HF transformer is applied to rectifier circuit to obtain constant low voltage and high current dc output.

The low voltage,high current dc output has several other applications such as heating of the bearings ,charging of super capacitors, electric welding.etc.As a result of the studies, the ac-dc converter model have been simulated in the PSIM software.


3	Switching frequency	Sw freq	25 KHz
4	Output voltage	Vdc	12V
5	Output current	Idc	25A

The above table shows the simulation parameters which were considered while simulating the circuit in PSIM software.


III. SIMULATION RESULTS

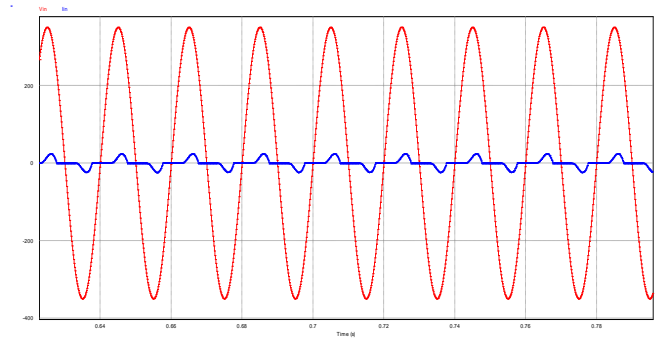

.Input voltage & current of ac-dc converter

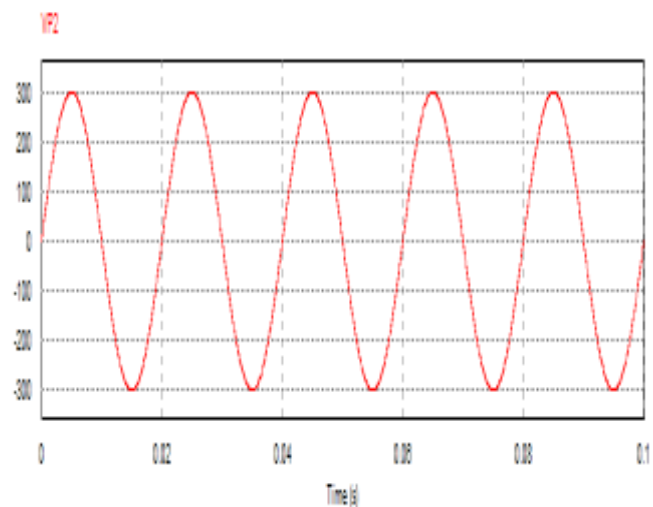


.Input voltage of rectifier

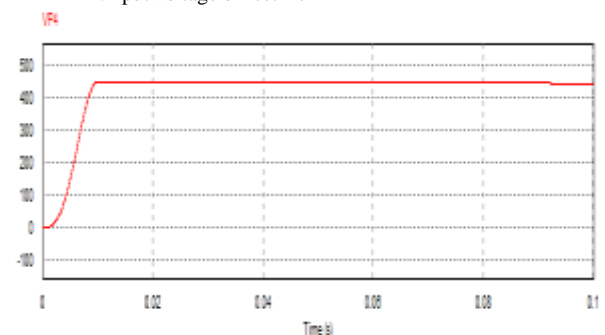


.Output voltage of rectifier

TABLE I
 SIMULATION PARAMETERS


S. N	Parameters of AC-DC Converter		
	Parameters	Symbols	Values(Units)
1	Applied voltage	Vac	325 V
2	Applied current	Iac	3A

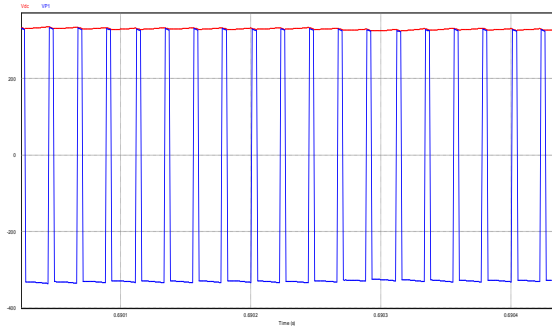



.Input and Output Voltage of Inverter

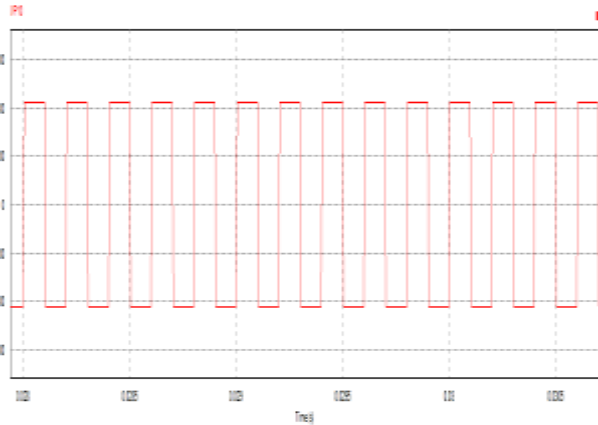

.Input voltage of transformer

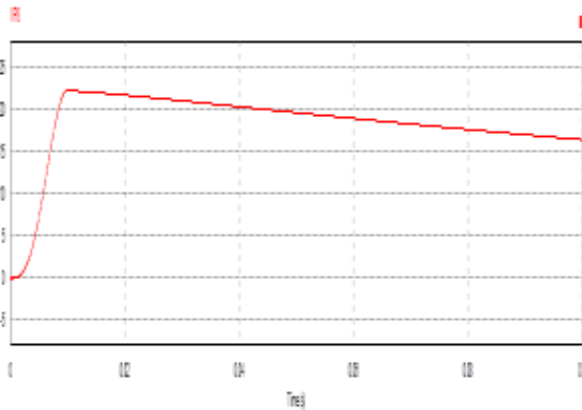

.Output voltage of transformer

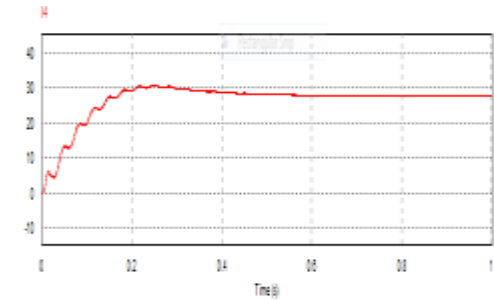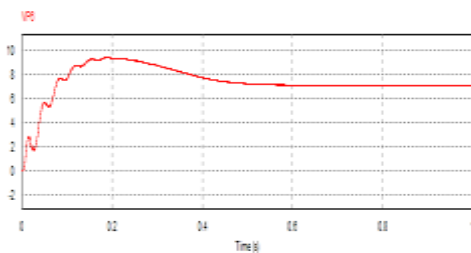

.Low Voltage and High Current dc Output of Converter

The above waveforms are the result of the simulation circuit of ac-dc converter in the software.

IV. TRANSFER FUNCTION MODELLING

The following assumptions were considered while the open loop transfer function model of resonant converter[11].

- (a) The ideal diodes and switches are used.
- (b) The effect of snubber circuit on the performance of ac/dc converter is neglected.
- (c) The hf transformer is represented by “T” equivalent, the circuit(Losses in the hf transformer and distributed capacitance inside and outside the hf transformer are neglected.
- (d) Losses in the resonating components and the output filters are neglected.

The below Fig. 2 shows general block diagram representation of the ac-dc converter shown in Fig. 1.




Fig. 2

BLOCK DIAGRAM REPRESENTATION

Here $G_{fwd}(s) = G1(s).G2(s).G3(s).G4(s).G5(s)$

- $G_{fwd}(s) = G1(s)$ for rectifier,
- $= G2(s)$ for inverter,
- $= G3(s)$ for resonant tank circuit and hf transformer,
- $= G4(s)$ for output filter and load block,
- $= G5(s)$ for rectifier.

(a) Rectifier Block

The transfer function of rectifier block is obtained as:

$$G1(s) = \frac{V_{out}(s)}{V_{in}(s)} = \coth\left(\frac{sT_s}{2}\right)$$

(b) Inverter Block

The transfer function of rectifier block is given as[12]:


$$G2(s) = \tanh\left(\frac{sT_s}{2}\right)$$

Where T_s is the time period of the output square wave.

(c) Resonating tank and hf transformer circuit

The resonating capacitance and inductance nullifies the effective leakage reactance produced by the hf transformer. The transfer function of this block is given by:

$$G3(s) = \frac{1}{k_2 s^2 + k_4} \text{ where } k_2 = \left(\frac{M + L_P}{M}\right) LC \text{ and } k_4 = \frac{M + L + L_P}{M}$$

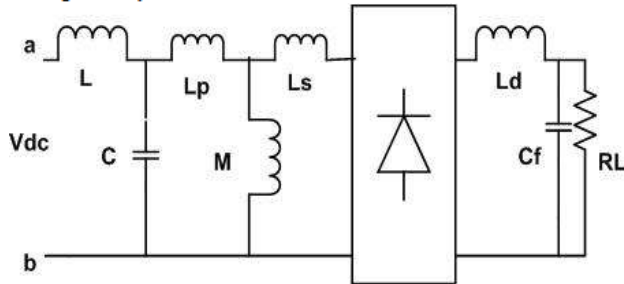

(d) Output Filter and Load Block

The output of the rectifier is filtered by inductor Ld and capacitor Cf and fed into the load resistance, RL. The transfer function of the filter cum load block is given by:

$$G4(s) = \frac{1/T6^2}{s^2 + \left(\frac{s}{T5}\right) + \left(\frac{1}{T6^2}\right)} \text{ where } T6 = \sqrt{L_d C_f} \text{ and } T5 = R_L C_f$$

(e) Forward Path Transfer Function

The transfer function of input and output rectifier are the same. The total transfer function of the forward path for the SPRC is the cascade of all individual blocks and can be written as:

$$G_{fwd}(s) = G1(s) \cdot G2(s) \cdot G3(s) \cdot G4(s) \cdot G5(s)$$

$$G_{fwd}(s) = \coth\left(\frac{sT_s}{2}\right) \cdot \frac{1}{k_2 s^2 + k_4} \cdot \frac{1/T6^2}{s^2 + \left(\frac{s}{T5}\right) + \left(\frac{1}{T6^2}\right)}$$

V. CONCLUSIONS

This paper represents low voltage high current capability of AC/DC converter which has minimum ripples, improved performance and high efficiency at the output. The merits of parallel resonant inverter topology and HF transformer has been examined and the AC-DC converter is simulated in software. Also the open loop transfer function of the converter is discussed. This topology gives high reliability, increased efficiency, improved performance, reduced cost, etc.

ACKNOWLEDGMENT

The authors would like to express sincere thanks to Department of Electrical Engineering of Shri Ramdeobaba College of Engineering and Management for the encouragement of the work.

REFERENCES

- [1] H. Y. Kanaan, S. Georges, I. Mougharbel, N. Mendalek and T. Nicolas, "Modeling, Control and Simulation of a High-Current DC-DC Converter for Fuel Cell Applications", International Conference on Renewable Energies and Power Quality (ICREPQ'09), Valencia (Spain), 15th to 17th April, 2009.
- [2] Yan Zhu and Brad Lehman, "Three-Level Switching Cell for Low Voltage/High-Current DC-DC Converters", IEEE Transactions On Power Electronics, Vol. 22, No. 5, pp.1997-2007, September 2007.
- [3] Mishima T, Hiraki E, Tanaka T, Nakaoka M, "A Novel Low-Voltage / High-Current ZCS-PWM DC-DC Converter with Asymmetrical Auxiliary Edge-Resonant Lossless Snubber", IEEE Power Electronics Specialists Conference, pp.748-753, 2007.
- [4] Colak I, Tuncay N, "High Current, Low Voltage Modular Power Converter For Lead Acid Battery Charging", IEEE International Conference on Sustainable Energy Technologies, pp.1042-1046, 24-27 Nov. 2008.
- [5] R. L. Steigerwald, "A Comparison of half-bridge resonant converter topologies," IEEE Trans. on Power Electronics, vol.3, no.2, pp.174-182, April 1998.
- [6] H.M.Suryawanshi, "Some Studies for Performance Improvement of High Frequency Resonant Converters", E.Eng thesis, Visvesvaraya Regional College of Engineering, Nagpur, India 1998.
- [7] A. K. S. Bhat, "Analysis and design of a series-parallel resonant converter," IEEE Trans. on Power Electronics, vol.8, no.1, pp.1-11, Jan.1993.
- [8] A. K. S. Bhat, "Characteristic of a series-parallel resonant converter with capacitive output filter operating on the utility line," Proceedings of IEEE, PEDES'96, pp.403-409, 1996.
- [9] H. M. Suryawanshi and S. G. Tarnekar, "Design and dynamic performance of modified series-parallel resonant converter," Submitted for publishing in IEEE Trans. On Industrial Electronics (U.S.A.)
- [10] M. J. Schutten, R. L. Steigerwald, M. H. Kheraluwala, "Characteristics of load resonant converter operated in a high-power factor mode," IEEE Trans. on Power Electronics, vol.7, no.2, pp.304-314, April 1992.
- [11] A. K. S. Bhat, "Transient Modelling and Simulation of Parallel resonant converter," IEEE Trans. on Power Electronics, 1990.
- [12] Handbook of Mathematical, Scientific and Engineering Formulas, Tables, Graphs, Transforms, Staff of Research and Education Association, Dr. M. Fogiel, Director.