

# Solar Tracking Development using Arduino along with Boost Converter and Charge Controller

Ankit Ghate<sup>1</sup>

M.Tech in Integrated Power System  
Electrical Engineering Department  
G.H.Raisoni College Of Engineering, Nagpur.  
Email: ankitghate@gmail.com

Asst. Prof. Rutuja Hiware<sup>2</sup>

Electrical Engineering Department  
G.H.Raisoni College Of Engineering, Nagpur.  
Email: rutuja.hiware@raisoni.net

**Abstract**— As solar energy in non-conventional energy sources and widely recognized form of energy; the solar energy source is available free of cost in the nature and it does not produce any pollution, so it is eco-friendly. In this for better performance and for maximization the output power of solar panel the Arduino based single axis solar panel tracking control method is used. And for maximum sun rays capturing the sensor based system is used for keeping the solar panel approximately at right angle with the incident rays. Also to provide proper charge electric current charge controller is used and for prevention of battery overcharging the boost converter is used to overcome the lower output voltage of solar panel for not fulfilling the minimum charging voltage requirement of the battery thus maximum power extraction is possible from the solar panel to battery.

**Keywords**—Single Axis Solar Tracking, Charge Controller, Arduino, Boost Converter, Microcontroller ATmega 16.

## I. INTRODUCTION

The renewable-energy sector is fast gaining ground as a new growth area for numerous countries with the vast potential it presents environmentally and economically. Solar energy plays an important role as a primary source of energy, especially for rural area. Solar energy is the technology used to harness the sun's energy and make it useable. Today, the technology produces less than one tenth of one percent of global energy demand. A non-conventional energy sources such as solar energy, wind energy, biofuels etc. are takes a vital role in the global growth because conventional energy sources are exhausting rapidly due to enormous consumption. At present, the scientists are eager to find out the various non-conventional energy sources that occupy the place of conventional energy sources.

Variation in insolation level causes the output of solar panel deviation from the maximum power available due to solar position changing, the tracker needs to response within a short time to the change to avoid energy loss. To maximizes the power extracted from solar module and power delivered to the load which is shown in following block diagram. Various scheme based on the use of conventional DC-DC converter, voltage change in LDR where combination of voltage and tracking position can be implemented with use of artificial intelligence algorithm. This result in a single axis tracking strategy along with charge controller and boost converter that makes tracking response faster.


## II. OPERATION OF SOLAR TRACKING

Solar tracking is one of the important aspects for the power quantity level in case of non-conventional energy sources. This tracking module is design on the basis of Light Dependent Resistor (LDR) characteristics. LDR is the light sensing device which make the resistance is changed according to the light intensity. Solar tracker are been classified in various types according to varying cost, performance and sophistication. One of which is one having static solar panels, single axis and duel axis solar tracker. To yield better performance from solar panels which held to increase 30 to 60% by utilizing tracking system instead of stationary array. An extra power upto 40% can be produce per annum using a variable elevation solar tracker. The tracker deals with specific design methodologies pertaining to Light Dependent Resistor (LDR), servo motors, solar panel, programmer selection and a software/system operation.

With the usage of Arduino as a programming platform the single axis tracker is very compatible system which to be developed. The output given to the servo motor will determine the movement of the solar panel which takes its analog input from the Light Dependent Resistor (LDR) and converts it into digital signal by Analog-to-Digital converter.

## III. METHODOLOGY

Figure 1 shows the system design block diagram of tracking system with the Arduino based microcontroller. To maximize the output power of the solar panel and to have higher efficiency this system works perfectly which is done by Arduino microcontroller. The charge controller are used to provide proper charge electric current and to prevent battery overcharging. The boost converter which overcomes the lower output voltage of solar panel for not fulfilling the minimum charging voltage requirement of the battery.

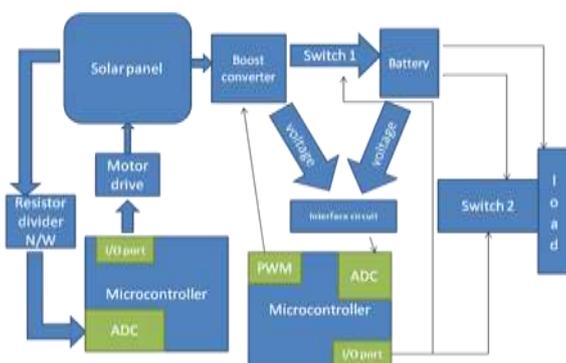



2011 IEEE First Conference on Clean Energy and Technology (CET), pp. 374-378,27-29.

- [6] Y.A. Sadawarte, Rajashree T. Hiware, Prateek Pathak, SameekshaTripathi, "Non Conventional Sources of Energy." International Conference on Emerging Frontiers in Technology for Rural Area (EFITRA) 2012 Proceedings published in International Journal of Computer Applications® (IJCA)