

## Study on Different Image Fusion Techniques

Miss. Yashashri Katole<sup>1</sup>, Prof. D. M. Sable<sup>2</sup>

<sup>1</sup>PG Student, Department of Computer Science & Engg., ACE, Wardha, (MH) India

<sup>2</sup>Associate Professor, Department of Computer Science & Engg., ACE, Wardha, (MH) India  
<sup>1</sup>yashashrikatole@gmail.com, <sup>2</sup>dhananjay.sable165@gmail.com

**Abstract:** Image fusion is characterized as the way toward joining at least two unique images into another single image holding imperative components from every image with amplified data content. The aftereffect of image fusion is another image which is more appropriate for human and machine discernment or further image handling undertakings, for example, division, highlight extraction and protest acknowledgment. This paper presents survey on a portion of the image fusion systems i.e. basic normal, basic most extreme, PCA, DCT, DWT. Similar investigation of every one of these strategies reasons that DWT is better approach.

**Keywords:** Image Fusion, Principal Component Analysis, Discrete Cosine Transform, Discrete Wavelet Transform

\*\*\*\*\*

### I. INTRODUCTION

Image Fusion is a system to enhance nature of data from an arrangement of images. The fusion of images is regularly required for images gained from various instrument modalities or catch systems of a similar scene or items (like multi-sensor, multi-center and multimodal images). For instance, in multi-center imaging at least one items might be in-center in a specific image, while different protests in the scene might be in center in different images. For remotely detected images, some have great unearthy data though others have high geometric determination. In the field of biomedical imaging, two generally utilized modalities, to be specific the attractive reverberation imaging (X-ray) and the processed tomography (CT) check don't uncover indistinguishably everything about mind structure. While CT sweep is particularly reasonable for imaging bone structure and hard tissues, the MR images are much unrivaled in delineating the delicate tissues in the mind that assume essential parts in identifying maladies influencing the skull base. These images are consequently integral from numerous points of view and no single image is absolutely adequate as far as their separate data content. The focal points these images might be completely abused by incorporating the corresponding elements seen in various images through the procedure of image fusion that produces a image made out of elements that are best distinguished or spoke to in the individual images. Vital utilizations of the fusion of images incorporate therapeutic imaging, minuscule imaging, remote detecting, PC vision, and mechanical technology. The initial move toward fusion, which might be translated as a preprocessing step is the enrollment which cuts down the constituting images to a typical arrange framework as fusion of images is significant just when regular questions in images have indistinguishable

geometric design concerning size, area and introduction in every one of the images. In the following stride, the images are joined to shape a solitary intertwined image through a sensible determination of extents of various components from various images[19].

The procedure of image fusion must guarantee that all striking data display in the source images are exchanged to the composite image. Image fusion can be performed at three levels: pixel, question, and choice level. In this paper pixel level based image fusion process is displayed to speak to a fusion procedure creating a solitary consolidated image containing an extra honest portrayal than individual source image[6].

### II. IMAGE FUSION TECHNIQUES

#### A. Simple Average

The districts of imagethat are in center have a tendency to be of higher pixel force. Hence this calculations a straightforward method for acquiring a yield picture with all areas in core interest. The estimation of the pixel P (i, j) of every picture is taken and included. This total is then separated by 2 to get the normal. The normal esteem is allocated to the relating pixel of the yield picture which is given in condition (1). This is rehashed for all pixel values [5].

$$k(i, j) = \{X(i, j) + Y(i, j)\}/2$$

(1) Where X (i, j) and Y (i, j) are two input images.

#### B. Simple Maximum method:

In this method, the resultant fused image is obtained by selecting the maximum intensity of corresponding pixels from both the input image[4].

$$F(i,j)=\sum_{i=0}^m \sum_{j=0}^n \max A(i,j)B(i,j)$$

(2) Where  $A(i,j)$ ,  $B(i,j)$  are input images and  $F(i,j)$  is fused image.

C. *Principal Component Analysis* Principal component analysis (PCA) is a vector space change frequently used to diminish multidimensional information sets to lower measurements for examination. PCA is the easiest and most valuable of the genuine eigenvector-based multivariate examinations, since its operation is to uncover the inside structure of information in an impartial way. In the event that a multivariate dataset is imagined as an arrangement of directions in a high dimensional information space (1 hub for each factor), PCA supplies the client with a 2D picture, a sorry excuse for this protest when seen from its most enlightening perspective. This dimensionally-lessened picture of the information is the appointment outline of the first two vital tomahawks of the information, which when consolidated with metadata, (for example, sexual orientation, area and so forth) can quickly uncover the primary elements fundamental the structure of data [1].

Fundamentally Primary part investigation is a procedure in which number of associated factors are changed into number of uncorrelated factors called vital segments. A smaller and ideal depiction of datasets is figured by PCA. The main primary segment represents however much of the fluctuation in the information as could reasonably be expected and each succeeding part represents however much of the rest of the difference as could reasonably be expected. Initially central segment is taken to be along the bearing with greatest difference. The second vital part is compelled to lie in the subspace opposite to the first inside this subspace, this segment focuses the bearing of most extreme fluctuation. The third foremost segment is taken toward most extreme fluctuation in the subspace opposite to the initial two et cetera. The PCA is additionally called as Karhunen-Loève change or the Hotelling change. The PCA does not have a settled arrangement of premise vectors like FFT, DCT and wavelet and so on and its premise vectors rely on upon the information set [2]. Picture fusion handle utilizing PCA can be portrayed as take after [4]:

✓ From the information picture frameworks deliver the section vectors.

- ✓ Compute the covariance network of two segment vectors shaped some time recently.
- ✓ Compute the Eigen qualities and Eigen vectors of the covariance network.
- ✓ The section vector relating to the bigger Eigen esteem is standardized by partitioning every component with mean of Eigen vector.
- ✓ Normalized Eigen vector esteem go about as the weight values which are individually duplicated with every pixel of the information pictures.
- ✓ The melded picture framework will be aggregate of the two scaled networks.

#### D. *Discrete Cosine Transform*

A DCT is utilized to express an arrangement of limited information focuses as far as a total of cosine capacities wavering at various frequencies. Discrete cosine change (DCT) is a critical change widely utilized as a part of computerized picture preparing. Extensive DCT coefficients are packed in the low recurrence district. Henceforth, it is known to have fabulous vitality conservativeness ace picture

#### Process Flow Diagram:

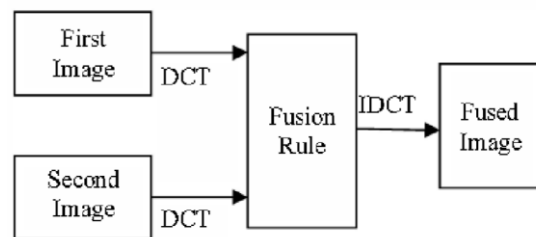


Fig. 1 Image Fusion Process using DCT

Image to be intertwined are isolated into non-covering pieces of size  $N \times N$  as appeared in Fig-1. DCT coefficients are registered for every piece and fusion guidelines are connected to get melded DCT coefficients. IDCT is then connected on the melded coefficients to create the combined picture/block[3].

#### E. *Discrete Wavelet Transform*

Wavelet changes are multi-determination picture decay instrument that give an assortment of channels speaking to the picture highlight by various recurrence sub bands at multi-scale. It is a well-known strategy in examining signals. At the point when decay is played out, the guess and detail segment can be isolated 2-D Discrete Wavelet Change (DWT) changes over the picture from the spatial area to recurrence space. As appeared in fig.2 the picture is isolated by vertical and flat lines and speaks to the primary request of DWT, and the picture can be isolated

with four sections those are LL1, LH1, HL1 and HH1[4]].



Fig 2. Wavelet Decomposition

General process of image fusion using DWT [4]:

Fig. 3 shows the process of image fusion using DWT.

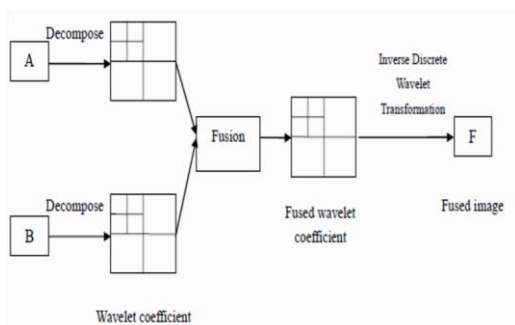


Fig 3. Wavelet based Image Fusion

Step 1. Execute Discrete Wavelet Change on both the info picture to make wavelet bring down deterioration.

Step 2. Meld every disintegration level by utilizing distinctive fusion run the show.

Step 3. Convey Backwards Discrete Wavelet Change on melded decayed level, which intends to remake the picture, while the picture remade is the intertwined picture F

### III. QUANTITATIVE IMAGE QUALITY METRICS

Quality is a trademark that measures saw picture corruption i.e., in correlation with perfect or impeccable picture. Assessment frames a fundamental part in the advancement of picture fusion systems. It includes Full Reference where quality is measured in examination with perfect picture and No Reference Techniques, which have no reference picture [1]. Here we utilize Full reference Techniques and no reference strategy.

#### A. Full Reference Methods

Presumptions made in the accompanying conditions are as An is the picture which is flawless, B is the resultant picture. i, j is the pixel line and section list.

Peak Signal to Noise Ratio (PSNR) is the proportion between the most extreme conceivable force of a flag and the force of undermining commotion that influences the loyalty of its representation. The PSNR measure is given by [5]:-

$$PSNR(db) = 20 \log \frac{255\sqrt{3MN}}{\sqrt{\sum_{i=1}^M \sum_{j=1}^N (B'(i,j) - B(i,j))^2}} \quad (3)$$

Where, B - the perfect image, B' - the fused image to be assessed, i - pixel row index, j - Pixel column index, M, N- No. of row and column.

#### a. Structural Content(SC)

The basic substance measure used to look at two picture in various little picture fixes the pictures have in like manner. The patches to be thought about are picked utilizing 2D ceaseless wavelet which go about as a low level corner locator. The substantial estimation of basic substance implies the picture is of low quality [7].

$$SC = \frac{\sum_{i=1}^M \sum_{j=1}^N (A_{ij})^2}{\sum_{i=1}^M \sum_{j=1}^N (B_{ij})^2} \quad (4)$$

#### b. Entropy(EN)

Entropy is a file to assess the data amount contained in a picture. On the off chance that the estimation of entropy gets to be distinctly higher in the wake of melding, it demonstrates that the data increments and the fusion exhibitions are progressed. Entropy is characterized as [5]:-

$$E = \sum_{i=0}^{L-1} p_i \log_2 p_i \quad (5)$$

Where L is the total of grey levels,  $p = \{p_0, p_1, \dots, p_{L-1}\}$  is the probability distribution of each level.

#### c. Mean Squared Error(MSE)

Mean square error is measure of picture quality list. Bigger estimation of mean square mistake implies that the picture is of low quality. The numerical condition of MSE is given as [5]:

#### a. Spatial Frequency(SF):

Spatial Frequency shows the general action in the intertwined picture. The SF is figured as[2]: Push Recurrence:

$$RF = \frac{1}{MN} \sum_{x=0}^{M-1} \sum_{y=1}^{N-1} |I_f(x,y) - I_f(x,y-1)|^2 \quad (8)$$

Column Frequency:

$$CF = \frac{1}{MN} \sum_{y=0}^{N-1} \sum_{x=1}^{M-1} |I_f(x,y) - I_f(x-1,y)|^2 \quad (9)$$

$$Spatial\ Frequency(SF) = RF^2 + CF^2 \quad (10)$$

Higher the SF means better performance.

b. *Standard Deviation(SD)*

Standard Deviation measures the contrast in the fused image. Fused image with high contrast would have high standard deviation[2].

$$SD = \frac{1}{MN} \sum_{y=0}^{N-1} \sum_{x=0}^{M-1} I_f(x,y) - U_{I_f}^2 \quad (11)$$

Where the mean is denoted as

$$U_{I_f} = \frac{1}{MN} \sum_{y=0}^{N-1} \sum_{x=0}^{M-1} |I_f(x,y)| \quad (12)$$

$$MSE = \frac{1}{mn} \sum_{i=1}^m \sum_{j=1}^n (A_{ij} - B_{ij})^2 \quad (6) \text{ precision.}$$

Where,  $A$  - the perfect image,  $B$  - the fused image to be DWT provides good quality fused images compared to assessed,  $i$  - pixel row index,  $j$  - pixel column index,  $m$ ,  $n$ - Simple average, simple maximum, PCA and DCT No. of row and column techniques.

e. *Normalized Cross Correlation(NCC)*

Normalized cross correlation are used to find out Fusion technique using similarities between fused image and registered image is <sup>DT-CWT" IEEE, 2013.</sup>

given by the following equation

$$NCC = \frac{\sum_{i=1}^m \sum_{j=1}^n (A_{ij} * B_{ij})}{\sum_{i=1}^m \sum_{j=1}^n (A_{ij} B_{ij})}$$

#### IV. CONCLUSION

In this paper, picture fusion idea , a portion of the picture fusion systems are examined and the picture quality evaluation parameters have been investigated and decide the part of individual picture quality appraisal parameter to decide the nature of the combined image.Selection of legitimate fusion method relies on upon the particular application.

The upside of basic normal system is that it is the easiest strategy for picture fusion , while its detriment is that this technique does not offer assurance to have clear questions from the arrangement of pictures. Basic most extreme procedure gives exceptionally engaged picture yield contrasted with normal technique, yet its inconvenience is that it gives obscuring impact which specifically influence on the complexity of the picture.

PCA system has great spatial determination, however creates ghostly corruption. PCA and DCT can be utilized for applications which does not require high caliber.

#### REFERENCES

- [1] A. Sasi, L. Parameswaran, Sruthy S, "Image Fusion technique using DT-CWT" IEEE, 2013.
- [2] V.Naidu, J.Roal, "Pixel-level Image Fusion using Wavelets and Principal Component Analysis", Defence Science Journal, Vol.58, No.3, May 2008.
- [3] R.Desale, S.Verma, "Study and Analysis of PCA,DCT & DWT based Image Fusion Techniques",International Conference on Signal processing, Image Processing and Pattern Recognition 2013.
- [4] K.Rani,R.Sharma, "Study of Different Fusion Algorithm", International journal of Emerging Technology and advanced Engineering , Vol.3, May 2013.
- [5] D.Sahu, M.Parsai, "Different Image Fusion Techniques-A Critical Review", International Journal of Modern Engineering Research, Vol.2, Sep-Oct.2012
- [6] A.Ufade, M.Kawade, "Comparision of spatial domain and transform domain image fusion technique for restoration of blur images", International Conference on Recent Trends in engineering & Technology-2013.
- [7] S.Bedi, J.agarwal, P.Agarwal, "Image Fusion Techniques and Quality Assessment Parameters for Clinical Diagnosis: A Review", International Journal of Advanced Research in Computer and Communication Engineering, Vol. 2, Iss. 2, Feb. 2013.
- [8] S.Krishnamoorthy, K.Soman, "Implementation and Comparative Study of Image Fusion Algorithms, International Journal of Computer Applications, Vol.9, Nov 2010.
- [9] S.Li, B.Yang, J.Hu, "Information Fusion", Elsevier 2010.
- [10] R.Singh, R.Dwivedi, S.Nagi, "Comparative Evaluation of DWT and DT-CWT for Image Fusion and De-noising", International Journal of Applied Information Systems, Vol 4, sept 2012.
- [11] H.B. Mitchell. Image Fusion theories, techniques, and applications", Springer-Verlag Berlin Heidelberg, 2010.
- [12] Y. Song, M. Li, Q. Li, and L. Sun, "A new wavelet based multifocus image fusion scheme and its application on optical microscopy," in Proceedings of IEEE Conference on Robotics and Biomimetics.
- [13] F. Sadjadi, "Comparative Image Fusion Analysais", IEEE Computer Society Conference on Computer Vision and Pattern Recognition, Volume 3, Issue , 20-26 June 2005.
- [14] J Zeng, A Sayedelahk, T Gilmore, P Frazier, M Chouika, "Review of Image Fusion Algorithms for Unconstrained Outdoor Scenes", Proceedings of the 8th International Conference on Signal Processing.
- [15] C. Xydeas and V. Petrovic, "Objective pixel-level image fusion performance measure", Proceedings of SPIE, Vol. 4051, April 2000.
- [16] R. S. Blum, "The Cramer-Rao bound applied to image fusion," in Proceeding of the 8th International Conference on Information Fusion, Philadelphia, PA, July 2005.

- 
- [17] Zhang, Z. and Blum, R. A categorization of multiscaledecomposition-based image fusion schemes with a performance study for a digital camera application. Proceedings of the IEEE, Vol.87, pp. 1315-1326, 1999.
  - [18] S. M. Mahbubur Rahman, M. Omair Ahmad and M.N.S Swamy, "Constant-based fusion of noisy image using discrete wavelet transform", IET Image Process, Vol. 4 Iss.5, 2010.
  - [19] S.Bhargavi, Pavithra.C, "Fusion of two Images based on Wavelet Transform", International Journal of Innovative Research in Science, Engineering and Technology, Vol. 2 Iss. 5, May 2013.
  - [20] M.Pradnya,S.Ruikar, "Wavelet based Image Fusion Techniques ", International Conference on Intelligent Systems and Signal Processing 2013.