

Effective Method for Image Classification with view Consistency Using Genetic Algorithm

Dnyaneshwar D. Sonewane

Department of Computer Science and Engineering
G.H. Raisoni Academy of Engineering and Technology,
Nagpur, India

E-mail: dnyaneshsonewane@gmail.com

Prof. Amit Pimpalkar

Department of Computer Science and Engineering
G.H. Raisoni Academy of Engineering and Technology,
Nagpur, India

E-mail: amit.pimpalkar@raisoni.net

Abstract—Multiview learning aims to unify different kinds of features to produce a consensual and efficient representation. This paper redefines part optimization in the PAF (Patch Alignment Framework) and develops a GSM-PAF (Group Sparse Multiview Patch Alignment Framework) and also use the GA (Genetic Algorithm) for optimizes the feature of each image in data set. The new part optimization considers not only the complementary properties of different views, but also views consistency. In particular, view consistency models the correlations between all possible combinations of any two kinds of view. We have to Extract the various kinds of features for each image and then generate the different view based on the features, then optimize the features of each image using Genetic algorithm and classify the images from the real world dataset and then generate different views based on the features with view consistency.

Keywords- *GSM-PAF, joint feature extraction and feature selection, Genetic Algorithm*

I. INTRODUCTION

Every day thousands of Images are generated, which are necessity to classify and access by an easy way. Classification is an information processing task in which image are categorization into multiple groups.

We are never to be classifying the images from image data set by using single feature. In this paper, we extract various kinds of features for each image, and then generate different views based on the features. These views are regarded as multiple views of an image. Each view is assumed to have a particular physical meaning and statistical property.

Recently, a large number of methods of learning from multiview data (Multiview Learning) by considering the diversity of different views have been developed. These views may be obtained from different visual views, multiple sources or different subsets. In this paper, we focus on image classification and each image has multiple features. In the high-dimensional space of each view's representation, it is hard to distinguish images of different classes (e.g. features that do not carry discriminative information weaken the capability of a trained model to separate samples from different classes).

GSM-PAF is recently used. GSM-PAF is extraction method based on PAF. PAF is proposed as a framework for dimensionality reduction. PAF unifies popular dimensionality reduction algorithms, e.g., PCA (Principal Component Analysis). GSM-PAF is a flexible and can be either unsupervised or supervised.

The GA is a population-based iterative optimization method. Here we would be performing classification based on

the Genetic algorithm so that we can get better and optimized Classification and it can optimised the feature of the images in image database. A genetic algorithm (GA) is a search heuristic that mimics the process of natural selection. This heuristic is routinely used to generate useful solutions to optimization and search problems. Genetic algorithms belong to the larger class of evolutionary algorithms (EA), which generate solutions to optimization problems using techniques inspired by natural evolution, such as inheritance, mutation, selection, and crossover. We apply this framework in image classification to investigate the effectiveness of the proposed algorithm. We first project the multiple view data into a low-dimensional space and then perform classification in this space using conventional classifiers such as KNN Classifier or SVM (Support Vector Machine) classifier.

This paper is organized as follows: In section II, we describe the related work. In section III present the Problem occurs in literature review. In section IV, we proposed the Genetic algorithm and GSM-PAF for optimization. In section V describe the advantage. Finally in section VI presents the conclusion of this work.

II. RELATED WORK

The following sections explain the survey of various papers. Different methods are used for extracting features of Images and optimize the feature for Image classification.

Jie Gui [1] describes a new linear multiview feature extraction method based on PAF. GSM-PAF is a further yet comprehensive development of patch alignment framework which unifies many dimensionality reduction algorithms a

framework of joint feature extraction and feature selection for multiview learning. GSMPAF is flexible and can be either unsupervised or supervised.

Z.-G. Fan [2] explained a large number of methods of learning from multiview data (multiview learning) by considering the diversity of different views. These views may be obtained from different visual views, multiple sources or different subsets. For example, any object can be captured from a range of visual views, e.g., (frontal and profile views of faces); a person can be identified by face, palmprint or iris with information obtained from multiple sources; or an image can be represented by its color or shape features, which can be treated as multiple features of the image. It also describes a discriminative feature selection method utilizing support vector machine for challenging task of multiview faces recognition.

C. M. Christoudias [3] studies how the accuracy can be improved of Object recognition when information from multiple views are integrated, but information in each view can often be highly redundant. The author consider the problem of distributed object recognition or indexing from multiple cameras, where the computational power available at each camera sensor is limited and communication between cameras is prohibitively expensive. There is an unsupervised multi-view feature selection algorithm based on a distributed coding approach. With our method, a Gaussian process model of the joint view statistics is used at the receiver to obtain a joint encoding of the views without directly sharing information across encoders. There is recognition and indexing tasks with multi-view image databases and show that our method compares favorably to an independent encoding of the features from each camera.

Tianhao Zhang [4], discuss about Spectral analysis based dimensionality reduction algorithms and applied in data mining and computer vision applications. Many algorithms have been developed, e.g., principal component analysis, locally linear embedding and local tangent space alignment. There is a framework, named “patch alignment”, which consists of two stages: part optimization and whole alignment. There is a new dimensionality reduction algorithm, termed Discriminative Locality Alignment (DLA), by imposing discriminative information in the part optimization stage.

Z.-Y. Zhang [5], Non-negative matrix factorization (NMF) mainly focuses on the hidden pattern discovery behind a series of vectors for two-way data. Tri-ONTD model performs adaptive dimension reduction for tensors as it integrates the subspace identification and the clustering process into a single process. The Tri-ONTD model can also be regarded as an extension of the Tri-factor NMF model. The Tri-ONTD model performs adaptive dimension reduction on tensors as it integrates the subspace identification and the clustering process into a single process. Three real-world applications are author clustering, image clustering, and image

reconstruction were conducted to demonstrate the effectiveness of the proposed model.

C. Xu [6] discuss about the multiview learning such as dimensionality reduction (feature extraction and feature selection, classification and clustering). A great many methods of learning from multi-view data by considering the diversity of different views have been developed. These views may be obtained from multiple sources or different feature subsets.

V. Bolón-Canedo [7] In this context, the important of feature selection is beyond doubt and different method has been developed. However with such a vast body of algorithm available, choosing the adequate feature selection is not an easy to solve question and it is necessary to check their effectiveness on different situation.

S. T. Roweis [8] explain many problems in information processing involve some form of dimensionality reduction. Here LLE (Locally Linear Embedding); an unsupervised learning algorithm that computes low dimensional, neighbourhood preserving embeddings of high dimensional data. LLE attempts to discover nonlinear structure in high dimensional data by exploiting

X. He [9] LPP (Locality Preserving Projection), as a linear version of manifold learning algorithm has attracted considerable interest in recent years. When LPP is applied to image representation and recognition, PCA is used for dimensionality reduction first. We prove that LPP can be directly implemented in DCT (Discrete Cosine Transform) domain.

Blum [10] explains multiple view learning introduced in semi-supervised learning. There is a co-training algorithm to use both labelled and unlabelled examples to train a classifier from two representations. The co-training algorithm trains one classifier on each view of the labelled examples and then iteratively allows each classifier to label the unlabelled examples it predicts with the highest confidence.

III. PROBLEM DEFINITION

Most of the existing multiview feature extraction algorithms share at least one of the following two problems: 1] out-of-sample problem (because they cannot extract the feature representation for test images directly but have to re-compute the embedding), and 2] over-fitting problem (because they linearly encode all the features without discarding redundant features), which are inappropriate for practical applications.

The image classification is more complex and difficult to classify if it contain blurry and noisy content. In supervised classification training data can be time consuming and costly and it is prone to human error. In unsupervised classification method are maximally-separable cluster in spectral space may not match our perception of the important

classes on the landscape and also limited control over the menu of classes.

IV. PROPOSED WORK

In the proposed work, we use the Genetic algorithm and GSM-PAF for better classification of Image. We first project the Multi view data into a low dimensional space and then perform classification in Genetic space using conventional classifier.

Here, first we take the Image Dataset as an Input then by using GSM-PAF algorithm we have to extract feature of each Image from Image Dataset. Then generate the Graph depend on the features of the image. After that for better classification of Image, we have to optimize the feature of each Image using Genetic algorithm.

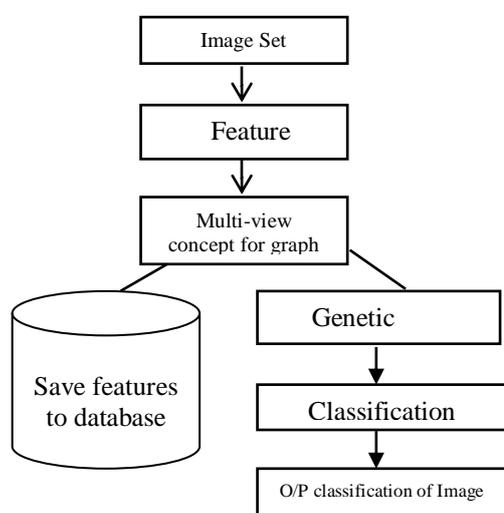


Figure: - System diagram for Image Classification

V. ADVANTAGES

Image classification is one of the important and complex processes in Image processing. Classification is an information processing task in which images are categorized into several groups. Using GA we have to optimize the feature of each image and classify the images from Image Data set. In supervised classification trained database is needed and also required human annotation. In supervised classification the operator can detect error and remedy them. In unsupervised classification human annotation is not needed and it is more computers automated. In unsupervised classification time taken is less and minimizes human errors.

VI. CONCLUSION

Using Genetic and GSM-PAF algorithm, feature optimization process is fast. GSM-PAF provides a flexible platform for designing various algorithms such as exploring supervised information in the part optimization and exploiting various optimization techniques for solving e.g. the smooth approximation of the cost function. Genetic algorithm

generates a population of points at each iteration for optimizing a feature of the Images in image data set.

REFERENCES

- [1] Jie Gui, Dacheng Tao, "Sparse Multiview Patch Alignment Framework With View Consistency for Image Classification" IEEE transactions on image processing, vol. 23,no. 7, july 2014
- [2] Z.-G. Fan and B.-L. Lu, "Fast recognition of multi-view faces with feature selection," 10th IEEE ICCV, Oct. 2005
- [3] C. M. Christoudias, R. Urtasun, and T. Darrell, "Unsupervised feature selection via distributed coding for multi-view object recognition," in Proc. CCVPR, Jun. 2008,
- [4] T. Zhang, D. Tao, X. Li, and J. Yang, "Patch alignment for dimensionality reduction," IEEE Trans. Knowledge Data, vol. 21,Sep. 2009
- [5] Z.-Y. Zhang, T. Li, and C. Ding, "Non-negative tri-factor tensor decomposition with applications," Knowledge Information System., vol. 34, no. 2, pp. 243–265, 2013.
- [6] C. Xu, D. Tao, and C. Xu, "A survey on multi-view learning," ArXiv: 5634, 2013.
- [7] V. Bolón-Canedo, N. Sánchez-Marño, and A. Alonso-Betanzos, "A review of feature selection methods on synthetic data," Knowledge Information System., vol. 34, 2013.
- [8] S. T. Roweis and L. K. Saul, "Nonlinear dimensionality reduction by locally linear embedding," *Science*, vol. 290, no. 5500, pp. 2323–2326.
- [9] X. He and P. Niyogi, "Locality preserving projections," in Proceeding Neural Information Processing System, 2004.
- [10] Blum and T. Mitchell, "Combining labelled and unlabeled data with co training," in Conference Computing Learn Theory, Jul. 1998.